

GABIONS GALFAN & POLYMER COATED

Gabions are baskets made of double twisted steel woven wire mesh, with mechanical characteristics higher than the ones suggested from 10223-3 (Figs. 1, 2). Gabions are filled with stones at the project site to form flexible, permeable, monolithic structures such as retaining walls, channel linings, and weirs for erosion control projects.

The steel wire used in the manufacture of the gabion is heavily galvanized with Galfan, a Zn-5%Al-MM (mischmetal) alloy. A PVC coating is then applied to provide added protection for use in polluted environments where soils or water are acidic: in salt or fresh water, or wherever the risk of corrosion is present. The PVC coating has a nominal thickness of 0.50 mm. The standard specifications of mesh-wire are shown in Table 2.

In order to reinforce the structure, all mesh panel edges are selvaged with a wire having a greater diameter (Table 3). Dimensions and sizes of Galfan + PVC coated gabions are shown in Table 1.

Wire

All tests on wire must be performed prior to manufacturing the mesh.

- Tensile strength:** the wire used for the manufacture of gabions shall have a tensile strength between 380-550 N/mm², exceeding, in order to increase the tensile resistance of the finished products, what is suggested from EN 10223-3. Wire tolerances (Table 3) are in accordance with EN 10218 (Class T1).
- Elongation:** Elongation shall not be less than 10%, in accordance to EN 10223-3. Test must be carried out on a sample at least 25 cm long.
- Galfan coating:** minimum quantities of Galfan shown at Table 3 meet the requirements of EN 10244-2 (Table 2 and Class A).
- Adhesion of Galfan:** the adhesion of the Galfan coating to the wire shall be such that, when the wire is wrapped six turns around a mandrel having four times the diameter of the wire, it does not flake or crack when rubbing it with the bare fingers.

P.V.C. (Polyvinyl Chloride) Coating

The technical characteristics and the resistance of the PVC to ageing meet the relevant standards. The main values for the PVC material, according to EN 10245-2, are as follows:

Specific weight: 1.30-1.35 kg/dm³ in accordance with ISO 1183;

Hardness: between 50 and 60 Shore D, according to ISO 868

Tensile strength: higher than 21N/mm², according to ISO 527

Elongation at break: not less than 200%, in accordance with ISO 527;

Colour: grey-RAL 7037

UV stabilized

Outwearing accelerated aging test in SO₂ (28 cycles) in accordance with EN ISO 6988.

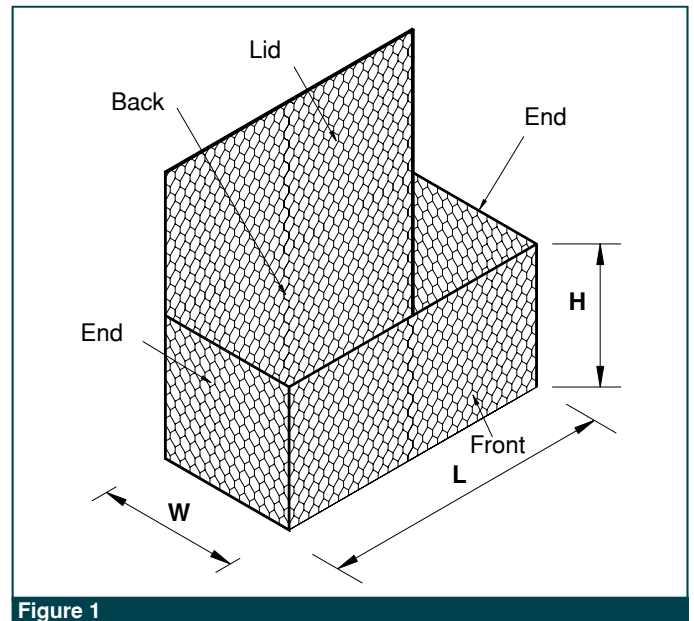


Figure 1

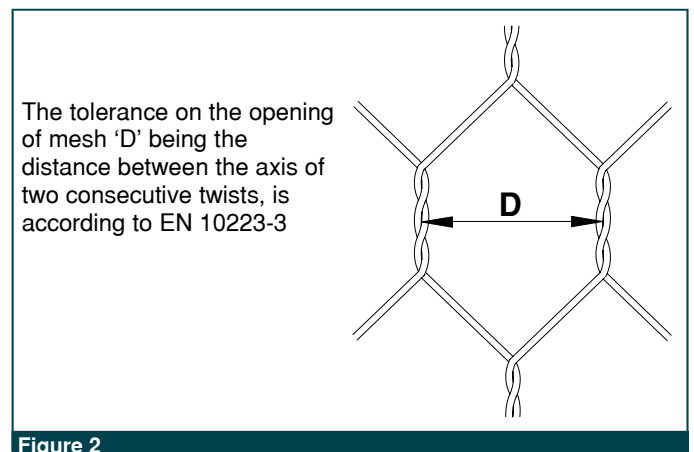


Figure 2

The tolerance on the opening of mesh 'D' being the distance between the axis of two consecutive twists, is according to EN 10223-3



Certified Product n. 226/001

1. Table of sizes for gabions

L=Length (m)	W=Width (m)	H=Height (m)
2	1	0.5
3	1	0.5
4	1	0.5
1.5	1	1
2	1	1
3	1	1
4	1	1

All sizes and dimensions are nominal.

(Table 1) Tolerances of $\pm 5\%$ of the width, height, and length of the gabions shall be permitted.

2. Standard Mesh-Wire

Type	D (mm)	Tolerance	Internal Wire Dia (mm)	External Wire Dia (mm)
8x10	80	+16%/-4%	2.70	3.70

3. Standard wire diameters

	Mesh Wire	Selvedge Wire	Lacing Wire
PVC Mesh Diameter	\varnothing mm	Int.2.7/Ext.3.7	Int.3.4/Ext.4.4
Wire Tolerance	(\pm) \varnothing mm	0.06	0.07
Min. Q.ty of Galfan	gr/m ²	245	265

Lacing Operations

Lacing operations can be made by using the tools shown in Fig.5. Galfan coated steel rings having the following specification can be used instead of lacing wire (Figs. 3, 4):

- diameter: 3.00 mm
- tensile strength: 170 kg/mm².

Spacing of the rings must not exceed 200 mm (Fig.3)

Quantity Request

When requesting a quote, please specify:

- size of units (length x width x height, see Fig.1),
- type of mesh,
- type of coating

EXAMPLE: No. 100 gabions 2x1x1m - Mesh type 8x10 - Wire diam. 2.7/3.7 mm - Galfan + PVC coated

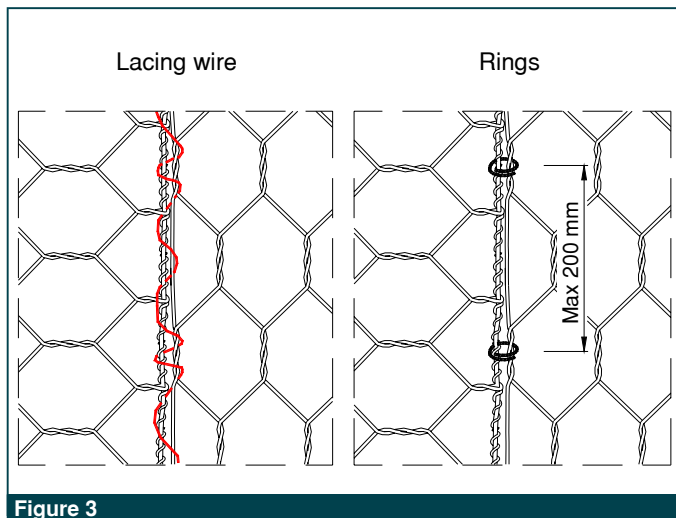


Figure 3

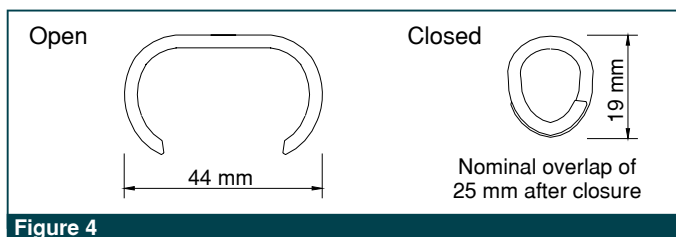


Figure 4

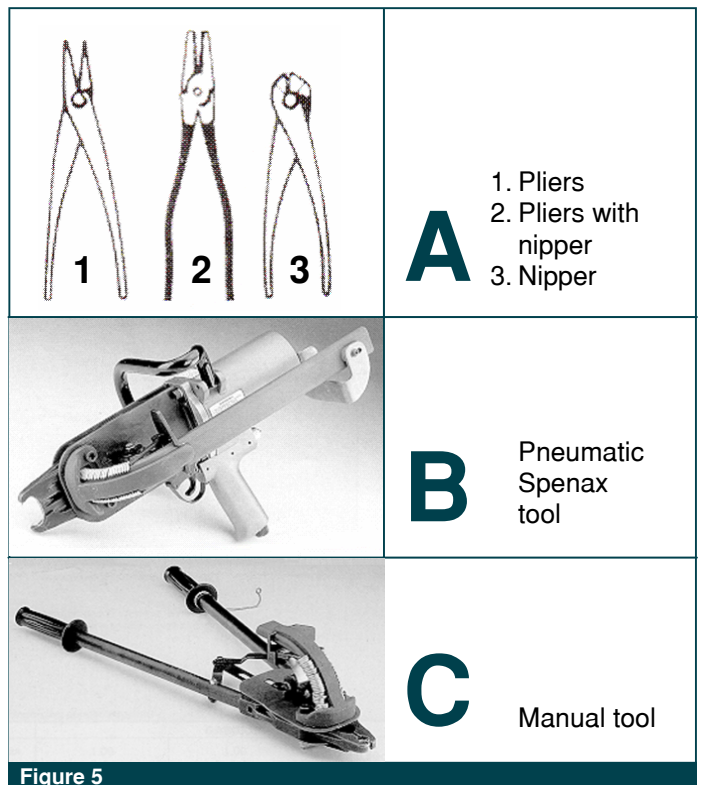


Figure 5

Officine Maccaferri S.p.A.

Via Agresti, 6 - P.O. BOX 396 - 40123 Bologna (Italy)

Tel. (+39) 051-6436000 - Fax (+39) 051-236507

E-mail: comes@maccaferri.com - Web site: www.maccaferri.com

Bureau Veritas Certified Quality System Company
with SINCERT's and UKAS's accreditation.